Color Variants

RW282262
fully integrated, with glass door
Niche width 56 cm, Niche height 177.2 cm

Optional accessories

RA050220
Replacement activated charcoal air filter.

Installation Accessories

RA221311
Stainless steel door panel with handle
RA425110
Handle bar, stainless steel, long

RW282262
Wine climate cabinet
fully integrated, with glass door
Niche width 56 cm, Niche height 177.2 cm

Two independantly controllable climate zones
Consistant temperatures with exact control from +5 °C to +20 °C
Humidity control
Extendable bottle trays in beech and aluminium
Presentation light option
Low-vibration operation
Combines with freezer RF 287 or RF 282 (side-by-side integration)
Capacity 80 bottles

Handling
Electronic temperature control with digital display.
Touch keys.
Presentation light option in each climate zone, dimmable.
Interior lighting with automatic dimming with opening and closing of door.

Features
Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system integrated in door hinge.
1 activated charcoal air filter for both climate zones.
UV-protection.
Open-door and malfunction alarm.
Child lock.

Features
Capacity 80 bottles (based on 0.75/l standard bottles).
10 bottle trays, 8 of which are extendable.
Storage of magnum bottles possible.
LED lighting.

Product rating
Noise level 35 dB (re 1 pW).

Planning notes
Flat hinge.
Door hinge right, reversible.
Height-adjustable feet.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 20 kg.
Door panel thickness min. 16 mm/ max.22mm.
The main socket needs to be planned outside of the niche.
For a side-by-side installation every appliance must be planned in its own niche.
The wine climate cabinet can be combined with a second wine climate cabinet or a freezer (RF 287 or RF 282) only. If combining the wine climate cabinet with other cooling appliances (RC, RT, RB), a clearance of min.
150 mm is to be kept between the appliances to avoid condensation.
No transport/operation above 1.500 m sea level.

Connection
Total connected load 0.130 KW.
Connecting cable 2.8 m with plug.

Characteristics

Energy Efficiency Class (Regulation (EU) 2017/1369)
G
Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369
176
Capacity of 75 cl bottles (EU 2017/1369)
80
Airborne acoustical noise emissions (EU 2017/1369)
32
Airborne acoustical noise emission class (EU 2017/1369)
B
Construction type
Built-in
Door panel options
Possible but accessory
Height (mm)
1770
Width of the appliance
557
Depth of the product
553
Required niche size for installation (HxWxD)
1772.0 x 560 x 550
Net weight (kg)
90.000
Connection rating (W)
130
Current (A)
10
Interior ventilator
Yes
Voltage (V)
220-240
Frequency (Hz)
50
Approval certificates
CE, VDE
Length of electrical supply cord (cm)
280
Plug type
Gardy plug w/ earthing
Number of compressors
1
Number of independent cooling systems
2
Reversible Door Hinge
Yes
Interior light switch
No
EAN code
4242006295028
Brand
Gaggenau
Product name / Commercial code
RW282262
Product category

Consumption and connection features

GAGGENAU

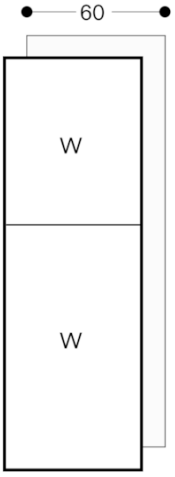

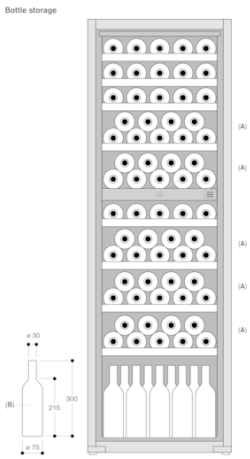

A: Suitable area for storage of magnum bottles in standard tray configuration

B: 0.75 litres
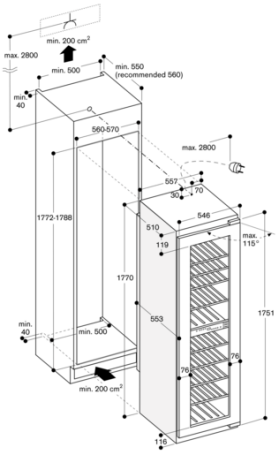
Measurements in mm